

- "above" "below"
 ja, jb (unsigned)
 jnb (unsigned)

ja, ja - signed

jc here (here = 2 bytes)

here contains a 2 byte value added to the current memory location


here is signed, no offset can be subtracted from current location

- Conversion Routines


get string

for a number 324, the string is 33323400

clear the eax register

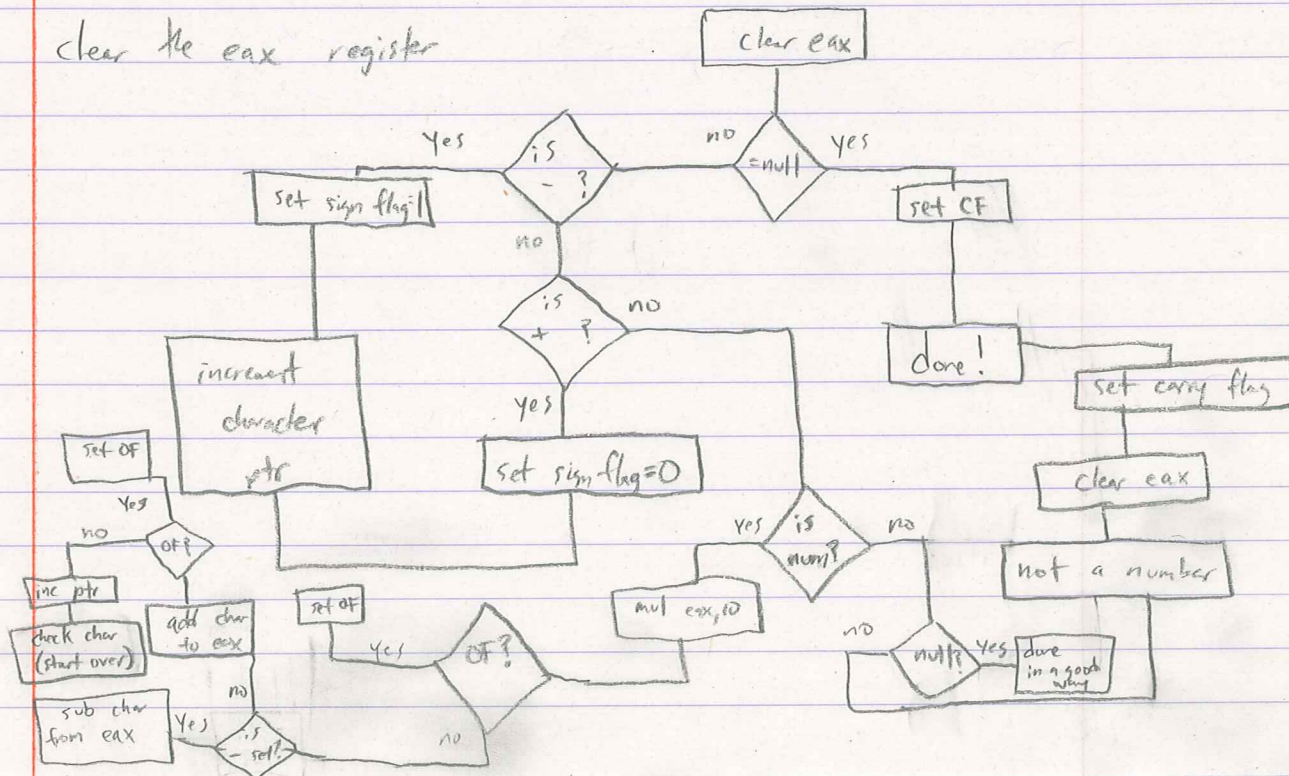

- convert from binary to ASCII

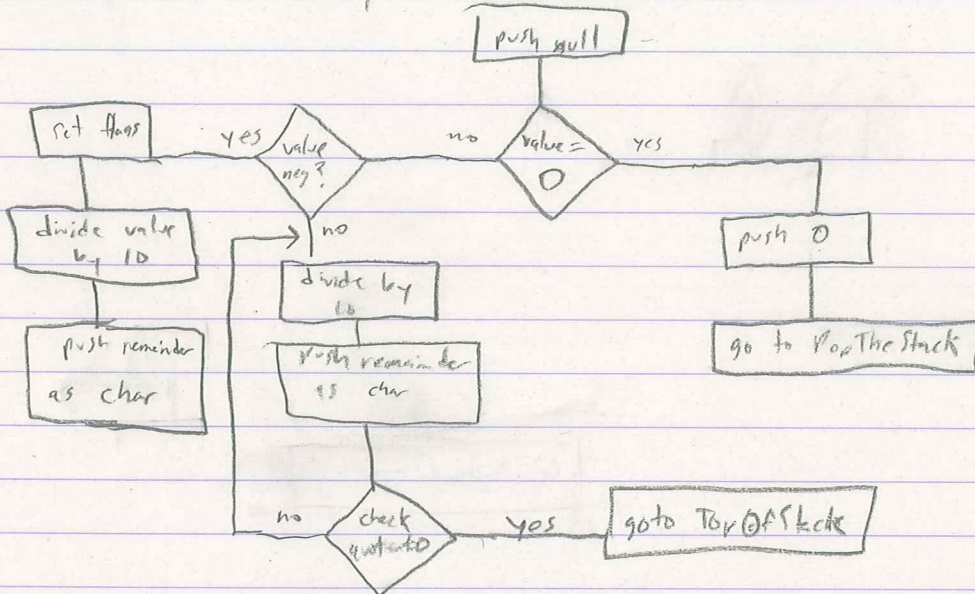

- pop The Stack

